

Model: CTCMT003-S
INCLUDED WITH CTCMTK-70 KIT

Before you Begin & Warnings


- Ensure you are a suitably qualified professional to complete this installation.
- Use adequate tools and safety gear.
- Do not overload the cable tray, MAX 2KG (evenly distributed).
- Do not modify the cable tray in any way.
- Do not bend or stress cables and accessories, items placed on the surfaces should be free to move and should not be under any load.
- Always ensure items placed on the surface are well ventilated.
- For INDOOR USE ONLY
- When selecting a mounting location, choose an area where you can firmly attach to a solid support structure.
- Ensure the surface will safely support the combined weight of the attached equipment and all attached hardware, accessories, cables and components.
- Always check thoroughly for sharp edges or damage. Do this prior to use and regularly when in use. If found DO NOT USE, replace or dispose immediately.
- Screws and washers have been supplied with this kit –
 - ALWAYS check your surface thickness and material before attempting to install. Check the screws are not too long for your installation surface, if too long they can protrude through and damage the surface.



PLEASE READ AND UNDERSTAND ALL WARNINGS, CAUTIONS AND OPERATING INSTRUCTIONS IN THIS MANUAL BEFORE USING OR INSTALLING THIS EQUIPMENT. Failure to follow all instructions may result in damage to your property or personal injury.

Installation

- Select your installation location. Install into wooden or engineered wood substrates.
- Check the surface can support the weight of the bracket and all attached equipment.
- Mark your intended attachment points with a pencil. Use one of the brackets as a template. We recommend placing one screw on each end and others spaced evenly along each bracket (within the attachment channel).
- Check your markings are in a straight line.
- Pre-drill pilot holes, do not use a drill bit that is too large or the screws will not fit.
- One person should hold the bracket in place while another attaches the screws.
- Use ALL screws and washers supplied (7 x). Firmly fix, do not overtighten.
- Ensure the washers are flat and have a firm seal against each side of the attachment channel – make sure they are not tilted, twisted or bent.
- Be careful not to damage the brackets or surfaces during installation.
- Check thoroughly for stability before use.
- NOTE: Max load 2Kg (evenly distributed).

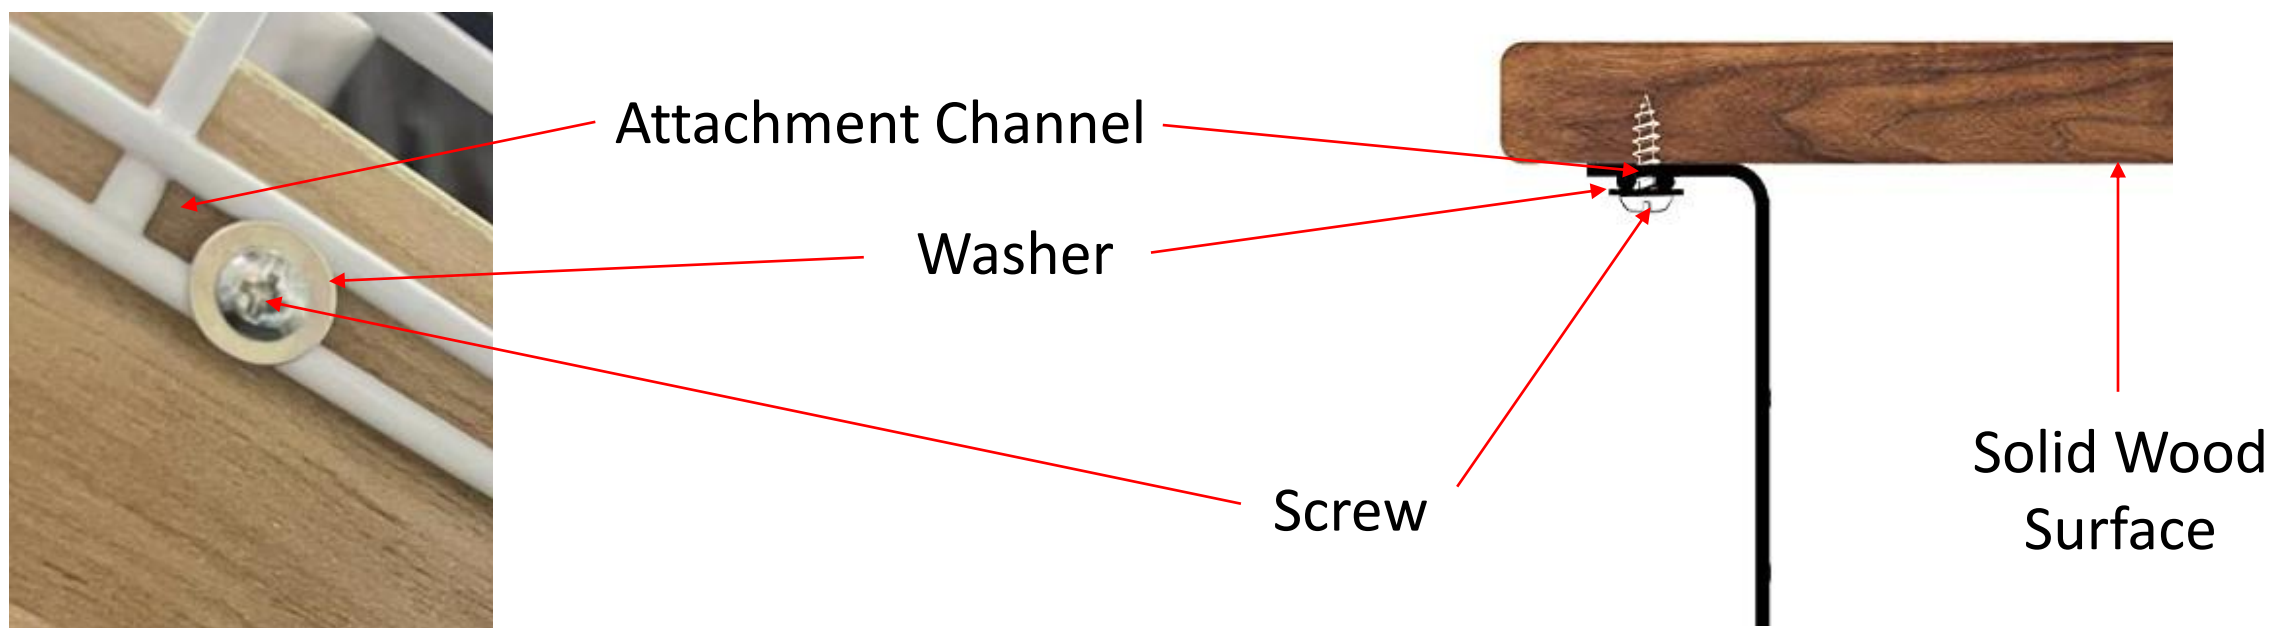

Cleaning & Maintenance

- Clean regularly to remove any dust or debris.
- Regularly check the product for damage, if found cease use - replace or dispose.

Warranty

Products are protected by warranty for a period of 1 year from date of purchase against manufacturing defects in material and functionality. Should a product fail to perform as described within the warranty period, return to the original place of purchase and provide a copy of the proof of purchase for warranty claim.

DISTRIBUTED BY:



Cord Tech



www.cordtech.com