


INSTALLATION GUIDE ACCESSORY GRAB RAIL

IMPORTANT

- In order to achieve the specified weight capacity, this product must be fixed to the internal wall stud or a solid framing structure.
- The included fixings are for use with solid walls only. It is the installer's responsibility to ensure that the correct fixings are used to suit the wall type and that the product is mounted to a structure capable of supporting the specified weight capacity.
- Only the large diameter rail can handle the specified weight capacity. The thin rails must not be used to support the user.
- This item is suitable for indoor use only. Prolonged UV exposure may cause premature degradation of the flange O-rings. Outdoor installation will void warranty.

INSTALLATION

1. Slide the flange covers off to expose the brackets. Position the grab rail into the desired location, then mark around the two fixing brackets.
2. Unscrew the brackets to disconnect them from the grab rail.
3. Using the previous marks as a guide, position the brackets onto the wall and mark the drilling holes. Using an appropriate drill bit (i.e. masonry bit for tiles), drill holes to suit the wall plugs. Line up the brackets with the drilled holes and install the screws.
4. Reattach the grab rail to the brackets by tightening the brass nut with the included C-spanner. Note—you may need to use a soft rubber mallet if alignment is slightly out. Slide the flange covers over the brackets.

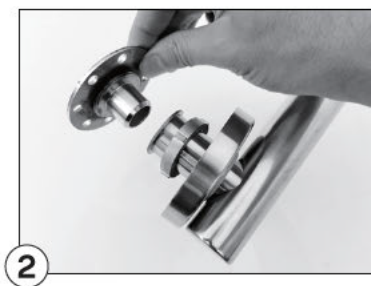

CARE AND MAINTENANCE

- Clean with a soft cloth and warm soapy water.
- Do not use harsh detergents, corrosive chemicals, or abrasive cleaners.