




INTERCONNECTABLE WIRELESS SMOKE ALARM

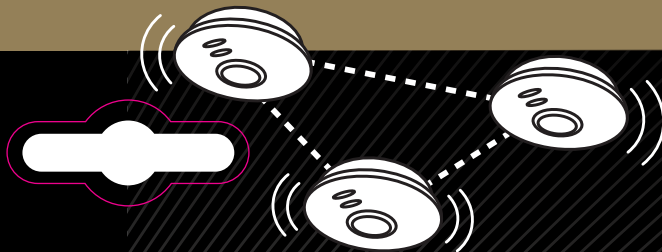

WHEN ONE ALARM SOUNDS
ALL INTERCONNECTED
ALARMS TRIGGER

CONNECT UP TO 40 UNITS



100 METRE
WIRELESS
DISTANCE


10
YEAR
WARRANTY



ADDITIONAL FEATURES:

- > PHOTOELECTRIC SENSOR
DETECTS SMOKE WHILE
MINIMIZING FALSE ALARMS
- > LOUD 85DB ALARM
- > TEST/HUSH BUTTON
- > SUITABLE FOR ALL ROOMS
- > NO WI-FI REQUIRED
- > REQUIRES NO WIRING
- > BATTERY LASTS 10 YEARS;
NO NEED TO CHANGE

INTERCONNECTABLE WIRELESS SMOKE ALARM



PRODUCT SPECIFICATIONS

- > POWER: Built-in DC3V(CR17450) Lithium battery (battery not replaceable)
- > OPERATION CURRENT: \leftarrow 70mA
- > WIRELESS FREQUENCY: 433.42MHz
- > WIRELESS DISTANCE: \rightarrow 100 metres in free field



- > MAX. NUMBER OF DEVICES IN NETWORK: 40
- > ALARM VOLUME: \rightarrow 85db(A) at 3 meters
- > SMOKE SENSITIVITY: 0.09~0.15db/m

- > SAME PUSH TEST BUTTON TO ACTIVATE SILENCE (HUSH) CONTROL
- > HUSH TIME: Approx 10 minutes
- > BATTERY LIFE: 10 years
- > COMPLIES WITH: AS3786:2014

- > LOCAL SMOKE ALARM SOUND PATTERN: ISO8201 (BI 0.5s - pause 0.5s - BI 0.5s - pause 0.5s - BI 0.5s - pause 1.5s, with the RED LED flash, repeat this alarm pattern)



INSTALLATION DIAGRAM

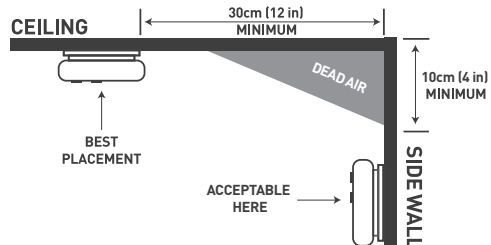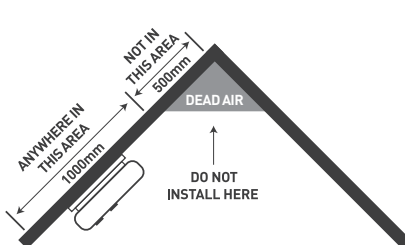

IMPORTANT SAFETY INFORMATION

1. Observe and follow all local and national electrical and building codes for installation.
2. Install a smoke alarm in every room and on every level of the home.
3. Test smoke alarm weekly to ensure proper operation.
4. Smoke alarm is suitable for wall mounting.



138-140 Bayfield Rd East,
Bayswater North, VIC, 3153, Australia.
P: (03) 9720 4333 F: (03) 9720 4344

MODEL NUMBER: FP520V
Made in China

